

JELLY

PAINTING MACHINE

PRACTICAL

It allows to apply the impregnating agent on timber elements quickly and easily on 1, 2, 3 or 4 sides at the same time.

EFFECTIVE

The working capacity of two people is about 200 m² | 2150 sqft per hour, if working on all four sides.

EFFICIENT

Excess paint can be recovered and put back in the container for re-use.




CHARACTERISTICS

FOCUS	impregnation of timber of max. 300 x 90 mm 11 3/4" x 3 1/2"
DIMENSIONS	L x B x H approx. 70 x 61 x 127 cm 2 3/4" x 2 3/8" x 5"
POWER	approx. 200 m ² 2150 sqft per hour
APPLICATION	also for tapped boards



VIDEO

Scan the QR Code and watch the video on our YouTube channel

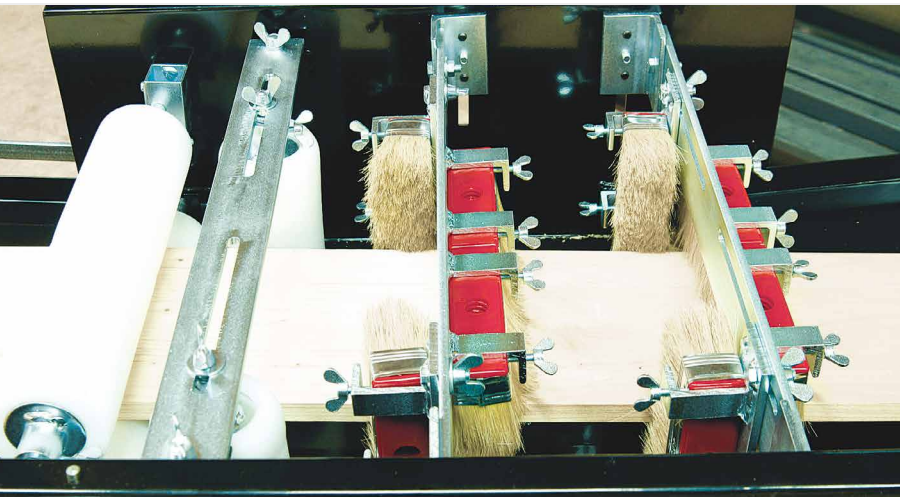

MATERIAL

Made with robust components for greater durability.

FIELDS OF USE

For the application of numerous types of colours, paints, impregnating agents for battens, planks and boards.


CODES AND DIMENSIONS

CODE	description	weight		pcs
		[kg]	[lbs]	
JELLY	painting machine	50	110	1


COMPLEMENTARY PRODUCTS

CODE	description	pcs
JLL2015	spare rolls set	6
JLL2020	spare brushes	12
JLL2025	spare tap	1
JLL2025SET	spare taps set	3
JLL2030	roll holder set	1
JLL2035	brush holder set	1
JLLFILTER300	filterbag 300m μ	25


INSTALLATION

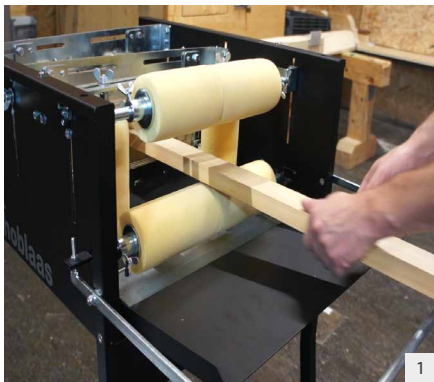

1 Insert the element between the two automatic coating machines

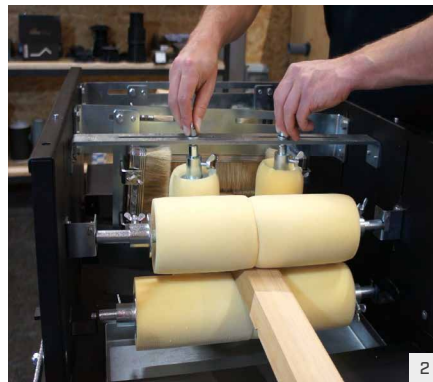

2 Adjust the sponges to the dimensions of the element and fix them by tightening screws.

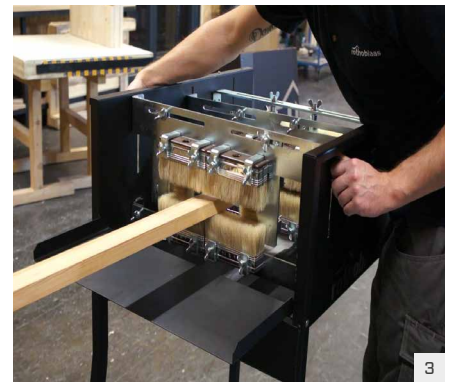

3 Adjust the brushes to the dimensions of the element and fix them by tightening screws.



4 Position the colour tank and make sure that nozzles are closed. Hook the collection bucket under the tank.



5 Enter paint or impregnating primer. If necessary, mix it until a homogeneous consistency is obtained.



6 Start the process: open the nozzles and wait for the rolls to absorb the colour. Finally, push the elements through the sponges.