

TOWER PEAK

ADAPTOR FOR DOUBLE LAYER RIDGE PIECE FOR TOWER



- Accessory that allows for anchor line assembly even on a closed roof package, without the need for opening and adapting to any slope
- The TOWER PEAK adaptor makes it possible to provide safety for up to four workers




CODES AND DIMENSIONS

CODE	material	B	H	L	pcs
		[mm]	[mm]	[mm]	
TOWERPEAK	S235JR zinc plated steel	100	30	350	1

COMPLEMENTARY PRODUCTS

n.	CODE	description	Ø	min. dimensions GL24h beam
			[mm]	[mm]
24	HBS	screw for timber	8	100 x 100

The values indicated are the result of experimental tests carried out under the supervision of third parties in accordance with the standard referred to. For a calculation report with minimum distances according to the relevant standard requirements, the substructure must be checked by a qualified engineer before installation.

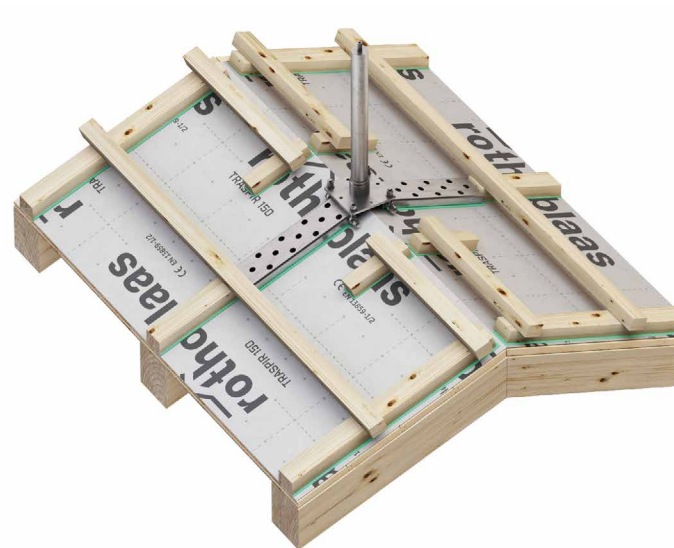

TOWER SLOPE

FASTENING GUIDE FOR TOWER ON RAFTER



- It can be positioned at any point on the roof
- Due to the range of action from 50 to 100 cm, it can cover the most common distances between beams



CODES AND DIMENSIONS

CODE	material	B	H	L	pcs
		[mm]	[mm]	[mm]	
TOWERSLOPE	S235JR zinc plated steel	100	20	1200	1

COMPLEMENTARY PRODUCTS

n.	CODE	description	Ø	min. dimensions GL24h beam
			[mm]	[mm]
16	HBS	screw for timber	8	100 x 100

The values indicated are the result of experimental tests carried out under the supervision of third parties in accordance with the standard referred to. For a calculation report with minimum distances according to the relevant standard requirements, the substructure must be checked by a qualified engineer before installation.

