

TRACK

RESILIENT SOUNDPROOFING PROFILE

COST-PERFORMANCE

Composition of the mixture optimised to provide both good performance and low cost.

FUNCTIONAL

Reduces flanking transmission of vibrations and improves airtightness.



CODES AND DIMENSIONS

CODE	B [mm]	L [m]	s [mm]	B [in]	L [ft]	s [in]	pcs
TRACK85	85	50	4,5	3 3/8	164	3/16	1



TECHNICAL DATA

Properties	standard	value
Hardness	EN ISO 868	65 ± 5 Shore A
Density	ASTM D 297	1,2 g/cm ³
Tensile strength	EN ISO 37	≥ 7,5 N/mm ²
Elongation at break point	EN ISO 37	≥ 250%
Compression set 50% (70h, 70°C)	EN ISO 815	35%
Max processing temperature	-	90 °C



MATERIAL



Synthetic rubber in compact extruded EPDM. High chemical stability, it does not contain harmful substances.

STABLE

Thanks to the solid EPDM mix, it endures over time. It is not affected by chemical attacks.

ALADIN & TRACK | Recommendations for installation

APPLICATION WITH STAPLES

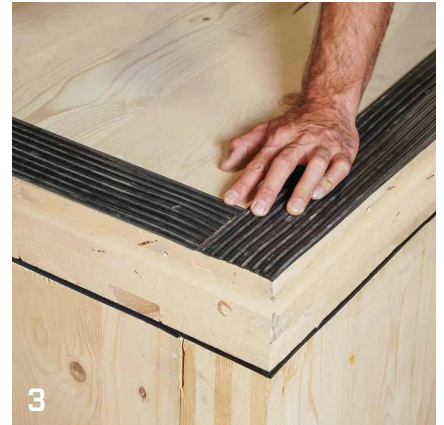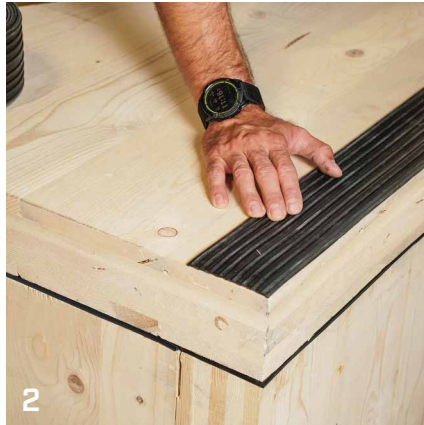

APPLICATION WITH PRIMER SPRAY



APPLICATION WITH DOUBLE BAND

